


Name	Date modified	Type
Dgm.FoodCourt	18/6/2552 9:42	File Folde
ETesting	18/6/2552 10:51	File Folde
nettiers-2.3-r807	4/6/2552 9:52	File Folde
SharpDevelop_3.1.0.4343_Source	23/6/2552 19:09	File Fold
WD	3/6/2552 15:16	File Folde
25520618_ETesting_src.rar	18/6/2552 9:34	WinRAR ;
SharpDevelop_3.1.0.4343_Source.zip	23/6/2552 10:39	WinRAR ;

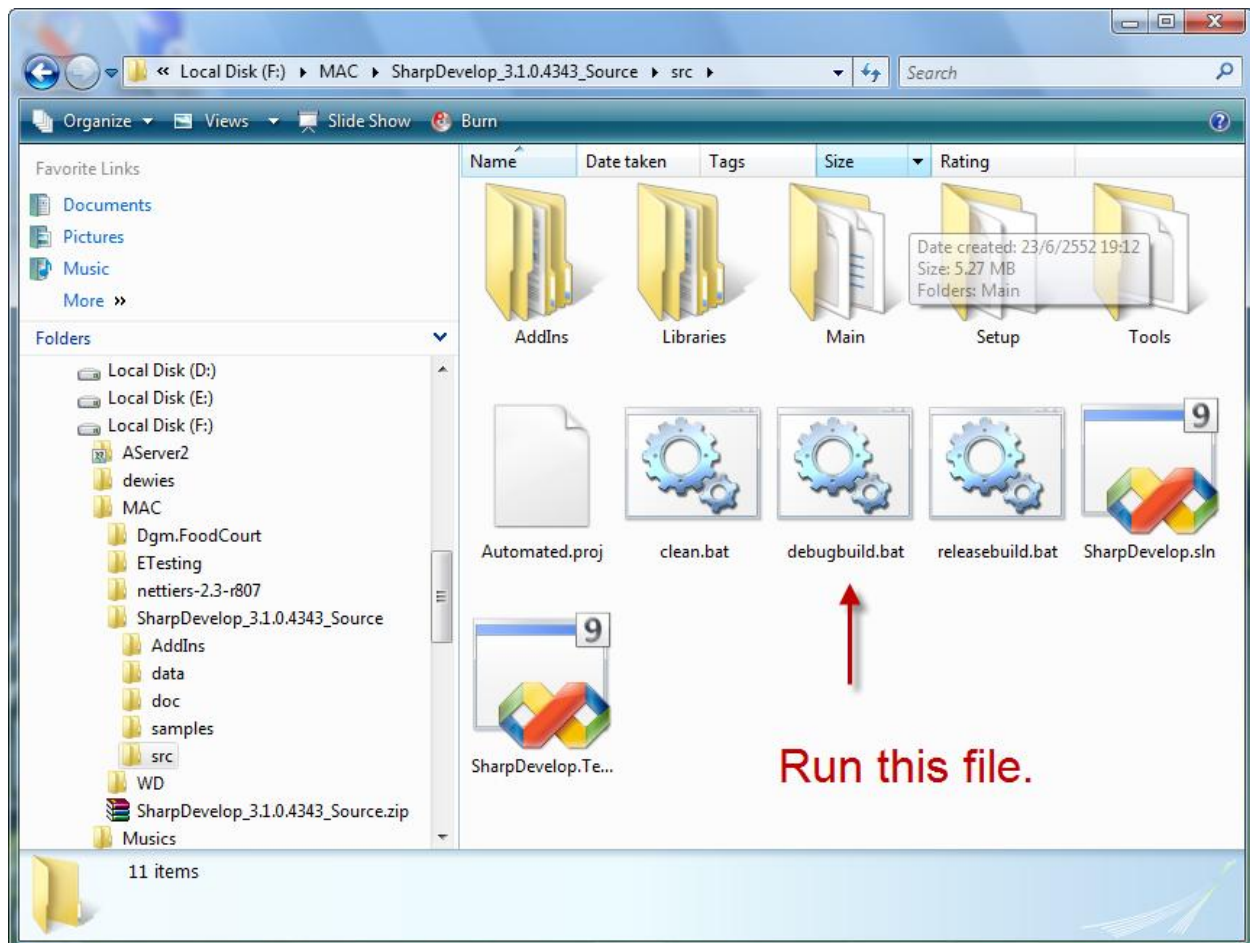

```



C:\Windows\system32\cmd.exe

htlist.cpp(8): fatal error C1083: Cannot open include file: 'cassert': No such
file or directory
f:\mac\sharpdevelop_3.1.0.4343_source\src\addins\misc\profiler\hook\main.h(32
): fatal error C1083: Cannot open include file: 'windows.h': No such file or di
rectory
f:\mac\sharpdevelop_3.1.0.4343_source\src\addins\misc\profiler\hook\main.h(32
): fatal error C1083: Cannot open include file: 'windows.h': No such file or di
rectory
f:\mac\sharpdevelop_3.1.0.4343_source\src\addins\misc\profiler\hook\main.h(32
): fatal error C1083: Cannot open include file: 'windows.h': No such file or di
rectory
f:\mac\sharpdevelop_3.1.0.4343_source\src\addins\misc\profiler\hook\main.h(32
): fatal error C1083: Cannot open include file: 'windows.h': No such file or di
rectory
F:\MAC\SharpDevelop_3.1.0.4343_Source\src\AddIns\Misc\Profiler\AutomatedBuild
.proj(31,3): error MSB3073: The command "call "C:\Program Files\Microsoft Uisua
l Studio 9.0\VC\bin\vcvars32.bat" && vcbuild /platform:Win32 /showenv "F:\MAC\S
harpDevelop_3.1.0.4343_Source\src\AddIns\Misc\Profiler\Hook\Hook.vcproj" Debug"
exited with code 1.

1 Warning(s)
13 Error(s)

Time Elapsed 00:00:10.13
Press any key to continue . . .

```

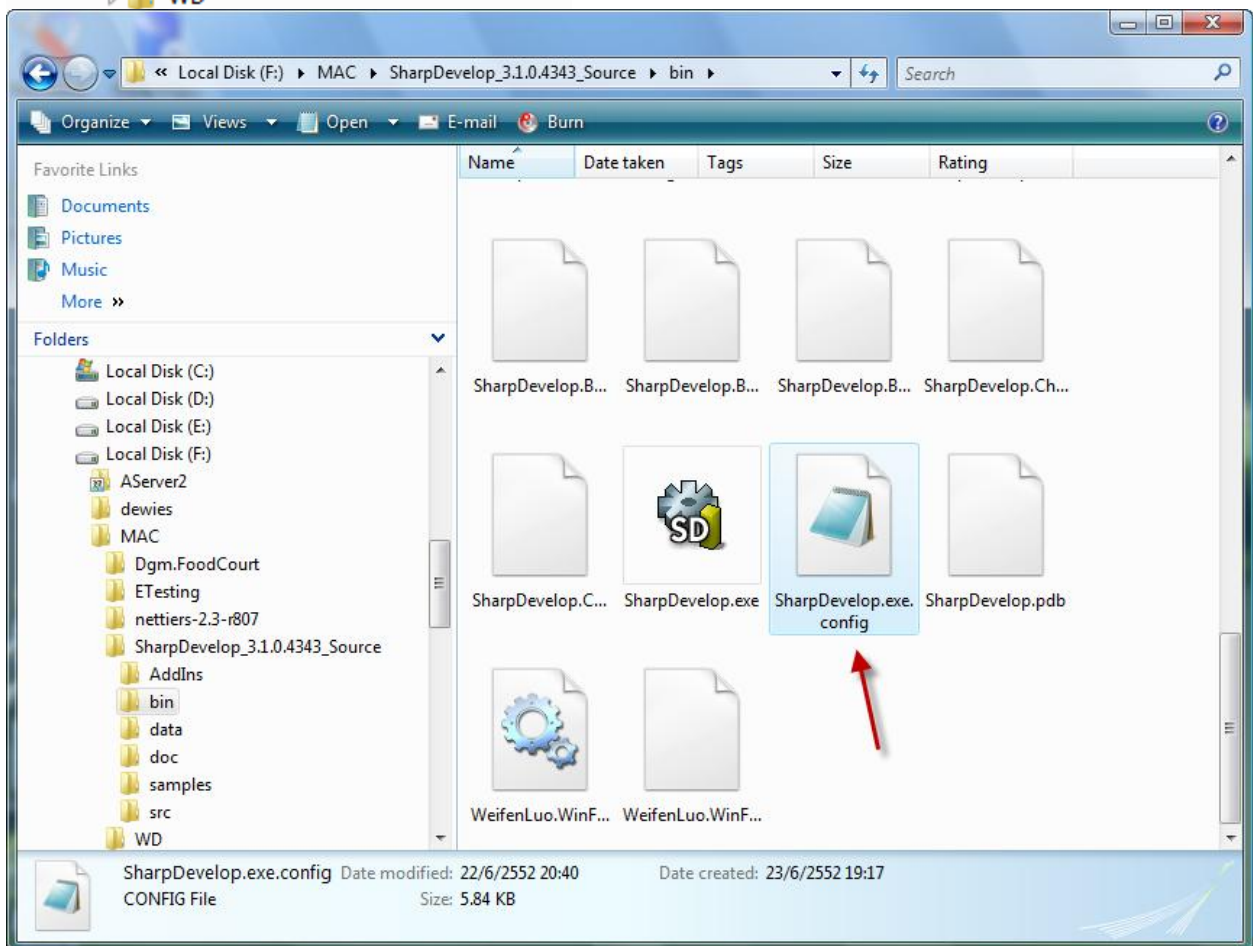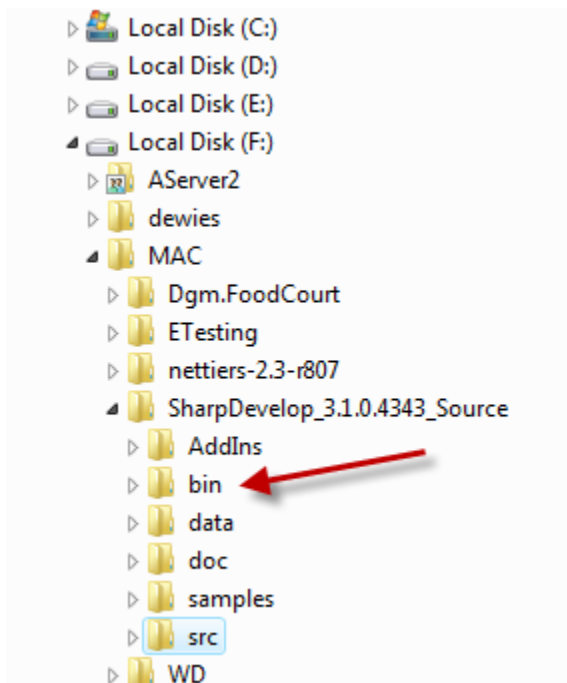

```
*F:\MAC\SharpDevelop\3.1.0.4343\Source\bin\SharpDevelop.exe.config - Notepad++
File Edit Search View Format Language Settings Macro Run TextFX Plugins Window ?

SharpDevelop.exe.config

52
53
54 <!-- redirect MSBuild.Framework requests to make old task assemblies work with MSBuild 3.5 -->
55 <dependentAssembly>
56   <assemblyIdentity name="Microsoft.Build.Framework" publicKeyToken="b03f5f7f11d50a3a" culture="neutral"/>
57   <bindingRedirect oldVersion="0.0.0.0-99.9.9.9" newVersion="3.5.0.0"/>
58 </dependentAssembly>
59 <dependentAssembly>
60   <assemblyIdentity name="Microsoft.CompactFramework.Build.Tasks" publicKeyToken="b03f5f7f11d50a3a" culture="neutral"/>
61   <bindingRedirect oldVersion="0.0.0.0-99.9.9.9" newVersion="9.0.0.0"/>
62 </dependentAssembly>
63
64 <probing privatePath="Tools\NUnit"/>
65 </assemblyBinding>
66 </runtime>
67 <appSettings>
68   <!-- Use this configuration setting to store settings in a directory relative to the location
69     of SharpDevelop.exe instead of the user's profile directory. -->
70   <add key="settingsPath" value="..\Settings" />
71
72   <!-- Use this setting to specify a different path for the code completion cache.
73     The cache contains information about referenced assemblies to speed up loading
74     the information on future SharpDevelop starts. -->
75   <add key="domPersistencePath" value="..\DomCache" />
76
77   <!-- Use this setting to disable the code completion cache. Code completion will still be
78     available, but take longer to load and use more RAM. -->
79   <!-- <add key="domPersistencePath" value="none" /> -->
80 </appSettings>
81 <log4net>
82   <!-- Writes to the console. The console is only visible in debug builds of SharpDevelop. -->
83   <appender name="ColoredConsoleAppender" type="log4net.Appender.ColoredConsoleAppender">
84     <mapping>
85       <level value="FATAL" />
86       <foreColor value="Red, HighIntensity" />
87     </mapping>
88     <mapping>
89       <level value="ERROR" />
90       <foreColor value="Red" />
91     </mapping>
92     <mapping>
93       <level value="WARN" />
94       <foreColor value="Yellow" />
95     </mapping>
96     <mapping>
97       <level value="INFO" />
98       <foreColor value="White" />
99     </mapping>
100   </appender>
101 </log4net>
```

